


COMPUTERIZED SOCK MACHINE (3D PLAIN INVISIBLE SOCKS)

全电脑袜机（立体、平板、隐形）

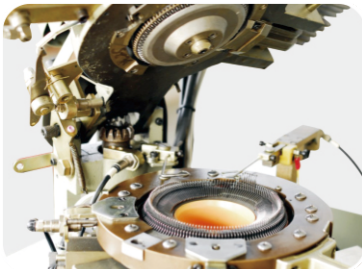

Main specifications and functions 主要规格参数

| Model                |             | WSD-6FP                                                                                              |          |          | WSD-6FP-I                                                                 |          |
|----------------------|-------------|------------------------------------------------------------------------------------------------------|----------|----------|---------------------------------------------------------------------------|----------|
| Cylinder diameter    |             | 3.5inch/5inch                                                                                        |          |          | 3.5inch                                                                   |          |
| Needle Number        |             | 72-220N                                                                                              | 176-220N | 144-220N | 72-220N                                                                   | 176-220N |
| Max speed            |             | Max speed 350rpm/min                                                                                 |          |          | Max speed 320 rpm/min                                                     |          |
| Running speed        |             | 250 rpm/min                                                                                          |          |          | 220 rpm/min                                                               |          |
| Function             |             | 1.Can choose one color or double elastic                                                             |          |          | 1.Can choose one color or double color elastic                            |          |
|                      |             | 2.6 color in 1 line, total 13 color in one sock                                                      |          |          | 2.According to customer's needs, special kinds of machines can be ordered |          |
|                      |             | 3. Can knit high heel, left and right foot. 180° against sock mouth, two colors sock heads and heel. |          |          | 3.One feeder or two feeder into yarn to knit singe/double welt design     |          |
|                      |             | 4.can knit 3D stereo socks                                                                           |          |          | 4.5 color in one line, total 10 color in one sock                         |          |
|                      |             | 5.The maximum horizontal stroke pulls is 39 cm                                                       |          |          | 5.The maximum horizontal stroke pulls is 39 cm                            |          |
|                      |             | 6.Can select the socks of varicose veins connected rubber fully                                      |          |          | 6.Can select the socks of varicose veins connected rubber fully           |          |
|                      |             | 7. Can make all kinds of plain socks                                                                 |          |          | 7.Can knit all kinds of plain invisible socks                             |          |
| Power Requirement    | Drive motor | 0.85 KW                                                                                              |          |          | 0.85 KW                                                                   |          |
|                      | Fun motor   | 0.75 KW                                                                                              |          |          | 0.75 KW                                                                   |          |
|                      | Control box | 0.80 KW                                                                                              |          |          | 0.80 KW                                                                   |          |
| Voltage              |             | 220V/380V/415V                                                                                       |          |          | 220V/380V/415V                                                            |          |
| Floor space          |             | 150×120×240cm                                                                                        |          |          | 150×120×240cm                                                             |          |
| Net/Gross weight     |             | 300/350 KG                                                                                           |          |          | 300/350 KG                                                                |          |
| Packing size (L×W×H) |             | 110×75×165cm                                                                                         |          |          | 110×75×165cm                                                              |          |

| 型号          |      | WSD-6FP                         |          |          | WSD-6FP-I              |          |
|-------------|------|---------------------------------|----------|----------|------------------------|----------|
| 针筒直径        |      | 3.5寸 / 5寸                       |          |          | 3.5 寸                  |          |
| 针数          |      | 72-220针                         | 176-220针 | 144-220针 | 72-220针                | 176-220针 |
| 最大转速        |      | 最大转速350转/分钟                     |          |          | 最大转速320 转/分钟           |          |
| 旋转速度        |      | 250 转/分钟                        |          |          | 220 转/分钟               |          |
| 功能介绍        |      | 1.有单色橡筋和双色橡筋可选择                 |          |          | 1.有单色橡筋和双色橡筋可选择        |          |
|             |      | 2.同一行6色，在袜子花型上可达到13个掉线色         |          |          | 2.根据客户的需要，定制各种特种机型     |          |
|             |      | 3. 高跟、大跟、小跟、左右脚、180度反嘴袜，两色袜头和袜跟 |          |          | 3.单路或二路进线织造单、双层罗口      |          |
|             |      | 4.能织3D立体袜                       |          |          | 4. 同一行5，在袜子花型上可达到10掉线色 |          |
|             |      | 5.最大横拉可达39厘米                    |          |          | 5. 最大横拉可达39厘米          |          |
|             |      | 6.可选配静脉曲张袜橡筋全衔接                 |          |          | 6. 可选配静脉曲张袜橡筋全衔接       |          |
|             |      | 7. 能织各种平板袜                      |          |          | 7.能织各种平板船袜             |          |
| 动力要求        | 驱动马达 | 0.85 KW                         |          |          | 0.85 KW                |          |
|             | 吸风马达 | 0.75 KW                         |          |          | 0.75 KW                |          |
|             | 控制箱  | 0.80 KW                         |          |          | 0.80 KW                |          |
| 电压          |      | 220V/380V/415V                  |          |          | 220V/380V/415V         |          |
| 占地面积        |      | 150×120×240cm                   |          |          | 150×120×240cm          |          |
| 净重/毛重       |      | 300/350 KG                      |          |          | 300/350 KG             |          |
| 包装规格(长×宽×高) |      | 110×75×165cm                    |          |          | 110×75×165cm           |          |

Note: "P" means Plain, "I" means invisible  
说明: "P" 代表平板, "I" 代表隐形